


CAUTION: 120V - USE ORANGE & WHITE WIRES
277V - USE RED & WHITE WIRES

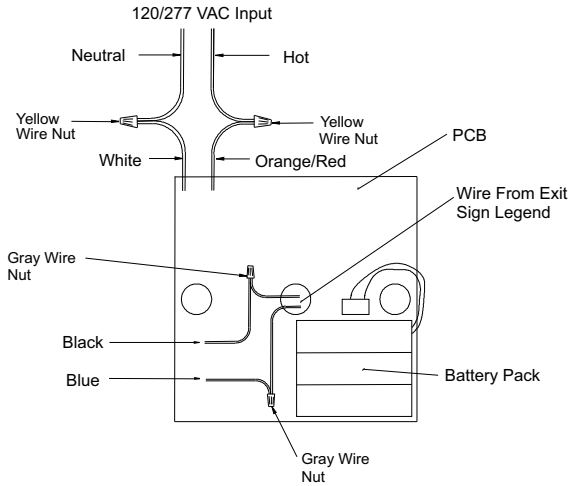

EXIT LITE

WITH BATTERY BACK UP

INSTALLATION INSTRUCTIONS

IMPORTANT SAFEGUARDS

•READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

- WARNING: BEFORE INSTALLING, TURN OFF ALL ELECTRIC POWER.**
- CAUTION: HIGH VOLTAGE.**
- WHEN USING ELECTRICAL EQUIPMENT, BASIC SAFETY INSTRUCTIONS SHOULD BE FOLLOWED.
- INSTALLATION OF THIS EQUIPMENT SHOULD BE PERFORMED BY QUALIFIED PERSONNEL ONLY.
- DO NOT USE OUTDOORS.
- DO NOT LET POWER SUPPLY CORDS TOUCH HOT SURFACES.
- DO NOT MOUNT NEAR GAS OR ELECTRIC HEATERS.
- EQUIPMENT SHOULD BE MOUNTED IN LOCATIONS AND AT HEIGHTS WHERE IT WILL NOT READILY BE SUBJECTED TO TAMPERING BY UNAUTHORIZED PERSONNEL.
- THE USE OF ACCESSORY EQUIPMENT NOT RECOMMENDED BY THE MANUFACTURER MAY CAUSE AN UNSAFE CONDITION.
- DO NOT USE THIS EQUIPMENT FOR OTHER THAN INTENDED USE.

•SAVE THESE INSTRUCTIONS.

IMPORTANT NOTES

- THE EXIT SIGN COMES PREASSEMBLED AS A SINGLE SIDE OR DOUBLE SIDED SIGN WITH BATTERY BACK UP.
- THE EXIT SIGN COMES PREASSEMBLED TO ALLOW FOR TOP MOUNTING.
- THE EXIT SIGN ALLOWS FOR SIDE MOUNTING OR BACK MOUNTING. SEE MOUNTING INSTRUCTIONS
- THE EXIT SIGN ALLOWS FOR 120 VOLT OR 277 VOLT HOOKUP.

•BRACKET INSTALLATION

****WARNING: DISCONNECT ALL POWER BEFORE INSTALLING OR SERVICING.**

ATTACH MOUNTING BRACKET TO JUNCTION BOX

NOTE: WHEN INSTALLING METAL BRACKET, MAKE SURE UNDERSIDE OF MOUNTING BRACKET STAMPED "TEST" IS FACING THE TEST BUTTON - THIS WILL ALIGN THE 2 SIDE HOLES OF THE PLASTIC MOUNTING BOX WITH THE 2 SIDE HOLES OF THE METAL MOUNTING BRACKET.

1. FEED SERVICE WIRES THROUGH 2" CENTER HOLE OF BRACKET.
2. ATTACH METAL MOUNTING BRACKET TO JUNCTION BOX WITH 2 EA. #8-32 x 1/2" SCREWS PROVIDED.
3. MAKE WIRE CONNECTIONS PER WIRING PROCEDURE.

Mounting

