



APPROVED FOR CONNECTICUT RED LED EXIT SIGN | WHEELCHAIR ACCESSIBILITY SYMBOL

Code: EXCT



The EXCT is a Connecticut Approved Exit Sign with International Symbol of Accessibility wheelchair pictograph.



FEATURES

- UL 924 Damp Location and State of Connecticut Build Code Approved
- Wheelchair Accessible Symbol
- NiCad 3.6V 300mAh battery backup option
- Universal 120/277 VAC operation
- Universal mounting canopy included
- Universal mounting pattern for surface mounting to a j-box
- Low Energy consumption (Less than 5W)
- Extruded aluminum housing with white finish
- Selectable chevron directional arrows
- Push-to-test switch
- Charge rate / power on LED indicator light

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The EXCT is UL listed and meets or exceeds the following: UL 924, State of Connecticut Building Code

ORDERING INFORMATION

| Series | Letter Color | Housing Color | Operation Type |
|--------|--------------|---------------|---------------------|
| EXCTW | G (Green) | W (White) | BB (Battery Backup) |

CONSTRUCTION

The EXCT-G Exit Sign offers durable extruded aluminum housing with a white powder coat finish.

ILLUMINATION

The EXCT-G Exit Sign uniform illumination is achieved by use long-lasting, efficient ultra bright green LEDs.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry. Operation Temperature range -10°C to 45°C / 14°F to 113°F

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The EXCT-G Exit Sign is designed with a maintenance-free 3.6V 300mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE

Temperature Ratings


Standard Option

14°F to 113°F

INSTALLATION

The EXCT-G Exit Sign is suitable for surface wall, side, and top mounting via included canopy. Universal mounting pattern on back faceplate allows for easy surface mounting to a j-box. Field selectable Chevron Arrows are included.

DIMENSIONS

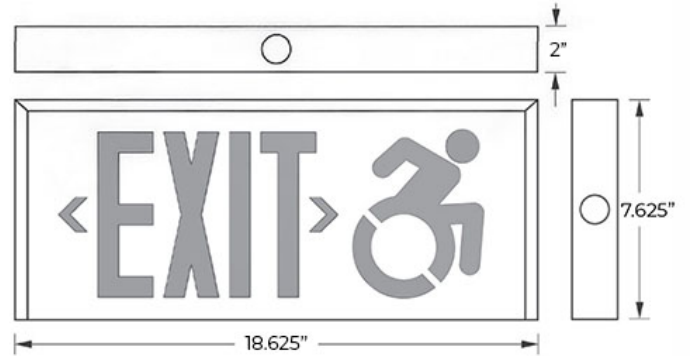

Weight : 8.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com